

# Performance Line UTV 445 / UTV 550



The **ØVERAASEN UTV 445 / UTV 550 Performance Line** snow blower have been designed for high capacity, high performance and economical use. The snow blowers are ideally suited to be used on the roughest mountain passes, clearing drifts, widening roads and snow removal at airports.

Based on the two-stage snow clearing system, the snow blowers are capable of clearing any kind of snow under all weather conditions.

The main advantages with this type of snow blowers are compact and powerful design, high clearing capacity, good casting performance, economical operation and operational flexibility.

The snow blowers are designed to be used in combination with a 20 - 25 tons front end loaders.





[eagle-myslik.com](http://eagle-myslik.com)  
[team-eagle.com](http://team-eagle.com)



## // ADVANTAGES

- Strong and compact design
- High clearing capacity
- Long casting distance
- Perfect overview
- Low fuel consumption
- Quick coupling concept

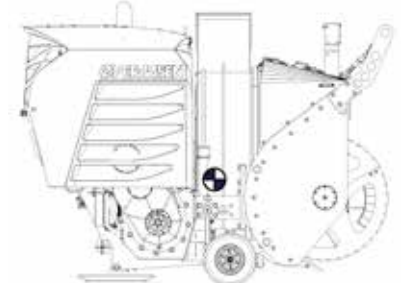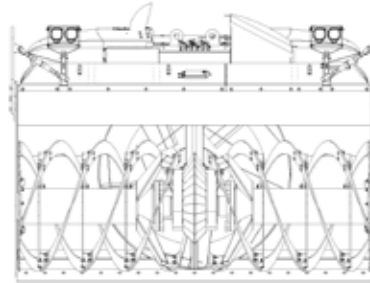

// TECHNICAL DATA	UTV 445	UTV 550
Diesel engine	Deutz TCD 12.0 V6 EU Stage V / Tier 4f	Deutz TCD 12.0 V6 EU Stage V / Tier 4f
Power output	330 kW / 448 HP	390 kW / 530 HP
Capacity	3 300 tons/h / 3 650 US tons	4 000 tons/h / 4 410 US tons
Casting distance, max	30 - 35 m / 98 - 115 ft	30 - 35 m / 98 - 115 ft
Clearing width	3 000 mm / 9 ft 10 inch	3 000 mm / 9 ft 10 inch
Clearing height	1 500 mm / 4 ft 11 inch	1 500 mm / 4 ft 11 inch
Auger diameter	Ø 1 100 mm / 43 inch	Ø 1 100 mm / 43 inch
Impeller diameter	Ø 1 600 mm / 63 inch	Ø 1 600 mm / 63 inch
Weight	from 8 400 kg / 18 520 lb	from 8 550 kg / 18 850 lb

## // STANDARD DELIVERY

- Control panel in cabin
- Volvo type quick coupler
- Rear skis
- 2 pcs. LED working lights
- Turnable impeller housing, 45° left, 0° right
- Adjustable front skis

## // OPTIONS

- Extension of impeller housing's outlet
- Foldable loading chute with hydr. adjustable flap
- Hydraulic slewing ring, 220°
- Hydraulic adjustable forward flap
- Working lights
- Engine heater, 110 V / 220 Volt
- Battery charger, 110 V / 220 Volt
- NATO socket, 24 Volt
- NATO jumper cable with connectors, 17 ft / 5 m
- Adapter for larger wheel loaders, L 150/180
- Modifying kit for Z-link wheel loaders
- Anticorrosion treatment